



# Jain Super Flow L Filter




**Twill Weave Screen**  
Twill weave screen assures high performance and effective filtration

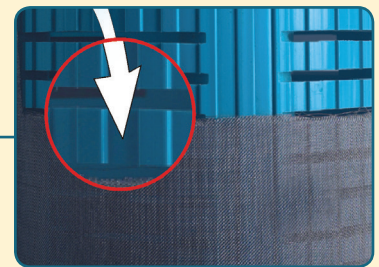

**Unique Smart Clean Element**  
Unique Smart Clean Element assures high performance and effective filtration.






**Easy for Maintenance**  
Smooth opening, drip-tight plastic clamp closure

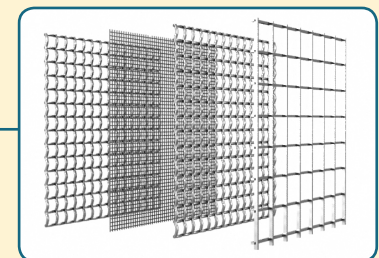


**Choice of Filtration Degree**  
Filtration available with following degree as 80, 100, 125, 200 & 300 micron

**OPTIONS**



# Jain Super Flow L Filter

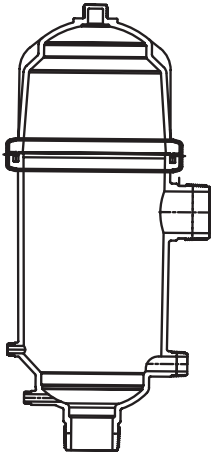

COMPACT



ANGULAR



## General Data



Filter	L Filter			
Model	Type	20C	20A	25C
Inlet/Outlet Diameter	inch	2"	2"	2.5"
	mm	50	50	65
Filtration area	cm <sup>2</sup>	807	1092	1092
	in <sup>2</sup>	125	169	169
Nominal flowrate	m <sup>3</sup> /h	20	25	40
	US gpm	88	110	176
Filtration degrees	micron	80, 100, 125, 200, 300		
Connection types	Type	BSP & NPT Male Threaded, Flanged & Grooved type		
Max. working pressure	bar	6		
	psi	87		
Max. working temperature	°C	60		
	°F	140		
Weight	kg	3.7	4.0	4.3
	lbs	8.2	9.9	9.5

## Filter Element Details



Construction Materials	Filter Housing	Glass Reinforced Polypropylene
	Filter Lid	Glass Reinforced Polypropylene
	Housing Seal	NBR
	Element	Cartridge: Ribbed PVC Screen: Twill weaved stainless steel

# Jain Super Flow L Filter



## Model 20C

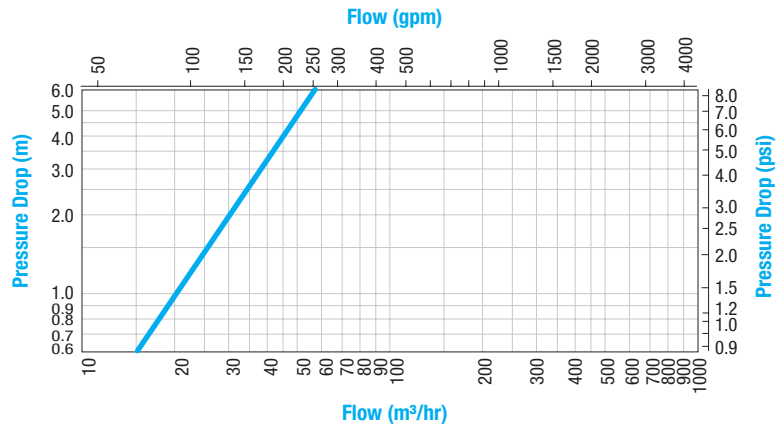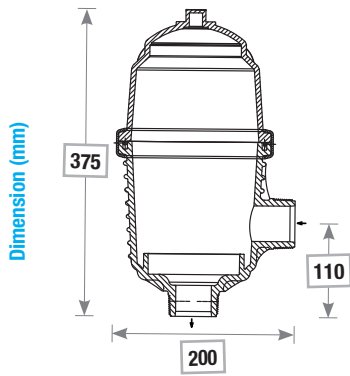

## Model 20A

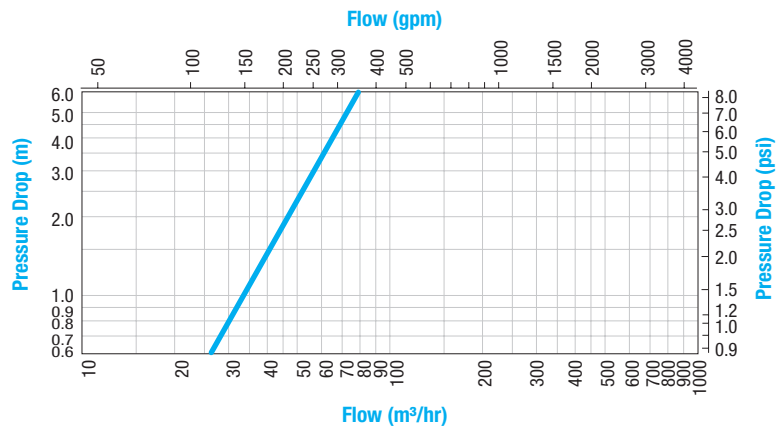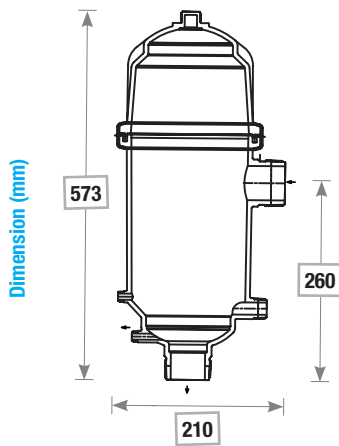


## Model 25C

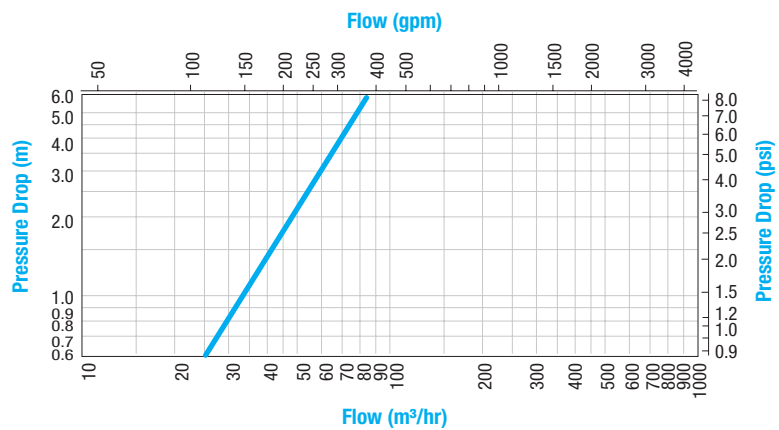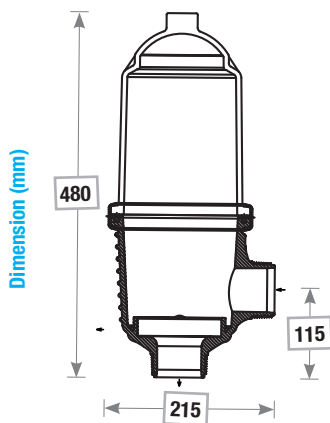

# Jain Super Flow L Filter

## Spare Part Guide

### Jain Super Flow Plus T Filter

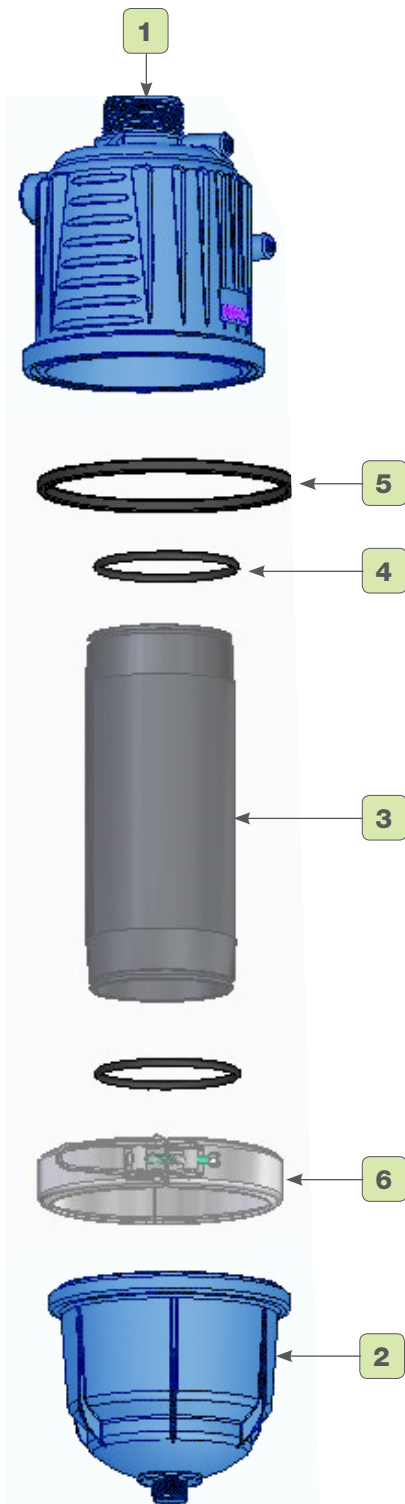





Part No.	Description	Code		
		20C	20A	25C
1	Filter Body BSPT	BJPSF2BN	BJPSF2B	BJPSF25BN
	Filter Body NPT	BJPSF2BNN	BJPSF2N	BJPSF25BNN
	Filter Body Grooved	BJPSF2VW	BJPSF2VW	BJPSF25VWN
2	Filter Cap	SCFC25P	SCFC25P	SCFC25PN
3	Filter Element	SCFE20PE	SCFE40PN	SCFE40PN
4	Element "O" Ring	SFE025E	SFE025E	SFE025E
5	Body "O" Ring	SFSR25E	SFSR25E	SFSR25E
6	Clamp	SFC25E	SFC25E	SFC25E

# Ordering Guide

## Jain Super Flow L Filter

Model			Filtration Degree		"Connection Size & Model Size / Type"			Connection Type	Type of Clamp	Pressure Rating	
1	2	3	4	5	6	7	8	9	10	11	12

Model			Filtration Degree		"Connection Size & Model Type"			Connection Type	Type of Clamp	Pressure Rating		
S	P	L	4	5	6	7	8	9	10	11	12	
S P L			SPL Jain Super Flow L Filter									
			Filtration Degree									
			0	8						08 80 Micron		
			1	0						10 100 Micron		
			1	2						12 125 Micron		
			1	4						14 200 Micron		
			Connection Size & Model Type									
			2	0	C						20C 2" S Model	
			2	0	A						20A 2" Model	
			Connection Type									
			A							A ANSI Flange Class 150		
			B							B MBSP Thread		
			C							C BS10 - E Flange		
			D							D DIN Flange PN10		
			Type of Clamp									
			M							M Metal Clamp		
			Pressure Rating									
			0	6	06	PN6						

Note: Accessories like drain valve, air release valve etc. are to be ordered separately